


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

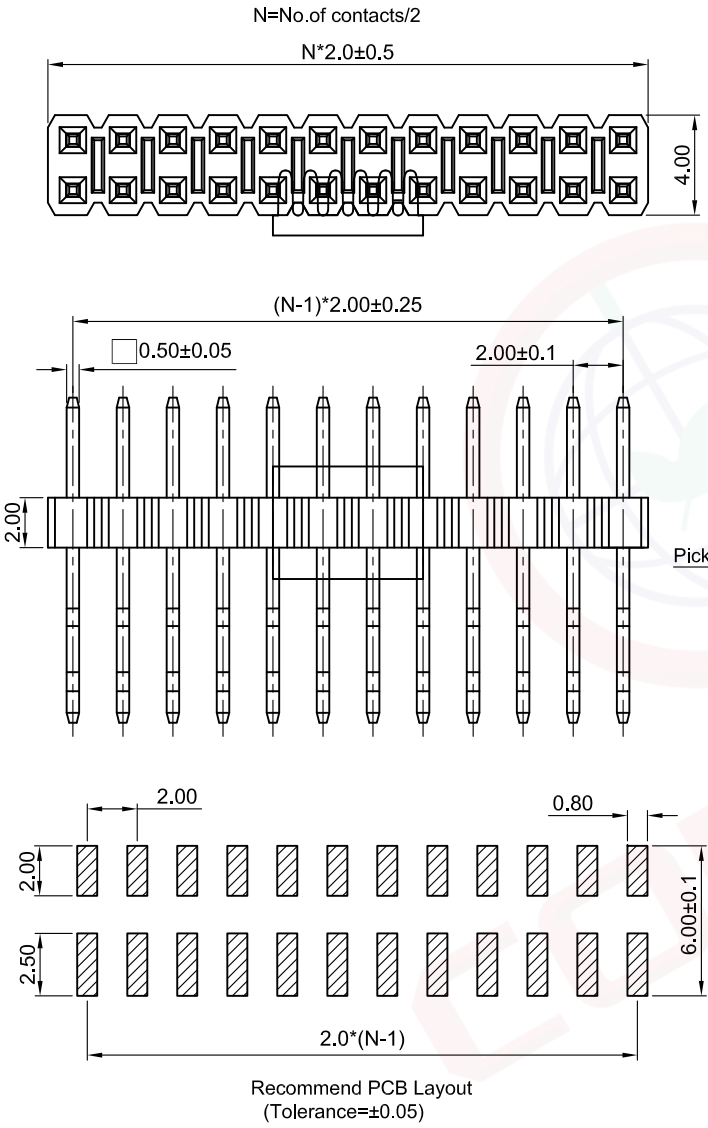

(Series Image-Reference Only)

TYPE	A
1	4.00
2	5.50
3	
4	
5	

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/08/05'		LJC 05/08/05'
B	ADD P/N CODE	JLZ 10/28/14'		LJC 10/28/14'
E	DRAWING UPDATE	JLZ 03/14/23'		
F	DRAWING UPDATE	JLZ 01/03/25'		

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
4. Current Rating: 1.5A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Material: High temp,Black,UL94-V0.

Product Number Code:

DS1025-07 - X X X X X X X X - X

Plating level
3A: Level 3A
B: Level B

Packing type
R: Tape on reel
N/A Code: Ploybag

Pick up support
S: W/ Pick up
N/A Code: W/O Pick up

Dim.A type
1: Type 1
or A*.*

Mounting type
S: SMT type

Housing color
B: Black

Contact plating
8: Full gold flash

Connector type
P: Plug

No.of contacts
2x2~2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0mm Pin Header Double Row SMT Type		
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1025-07 SERIES		
.X	±0.38	.X	±3°	SHEET SIZE	A4				
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1025-07-XXXXXX-X-F							



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD