



	A	B	C	D	E	F	G	H	I	
The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNELLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.	DC	ED	IE	ISO	PD	R&D	SD	QA	QC	QE
	Qty	Dept								

TYPE	Contact Plating				Shell Type (Shrapnel)	LED TABLE
	G/F	6u"	15u"	30u"		
1	W/	W/	W/O	W/	W/	TABLE1
2	W/	W/	W/	W/	W/ or W/O	TABLE2
3	W/	W/	W/O	W/	W/	TABLE3
4	W/	W/	W/O	W/O	W/ or W/O	TABLE4
5	W/	W/O	W/O	W/O	W/	TABLE5
6	W/O	W/O	W/O	W/O	W/	TABLE6
7	W/	W/O	W/O	W/O	W/	TABLE7
8	W/O	W/O	W/O	W/	W/	TABLE8

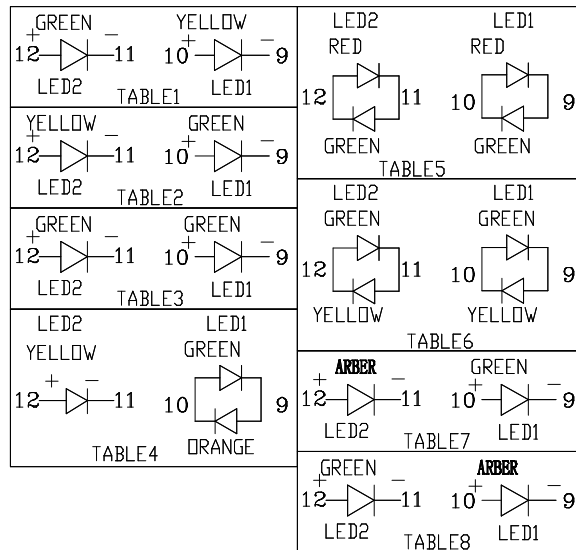

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/06/16'	HZW 06/06/16'	LJC 06/06/16'
B	DRAWING UPDATE	JLZ 04/08/22'		

Notes:

1. Electrical Characteristics:
 - 1.1 Contact Resistance: 20mΩ Max.
 - 1.2 Dielectric Withstanding Voltage: 500V AC(rms)
For 1 Minute.
 - 1.3 Insulation Resistance: 1000MΩ Min.
 - 1.4 Current Rating:1.5A.
 - 1.5 Voltage Rating:150V AC rms.
2. Environment Characteristics:
 - 2.1 Temperature: -40°C~+85°C.
3. Materials:
 - 3.1 Contact Material: Copper Alloy.
 - 3.2 Contact Plating: Sectective Gold Flash.
 - 3.3 Insulator Materials: PBT,UL94-V0.
4. Product Number Code:

DS1129-04-X X X X X - X

— LED Type

- 1: See Table
2: See Table

— Shell Type

S:W/ Shrapnel
X:W/0 Shrapnel

— Housing Materials



P:PBT

— Contact Plating
0:Selective Gold Flash
J:Selective 6u" Gold
5:Selective 15u" Gold
3:Selective 30u" Gold

— Housing Color
B:Black

— No.Of Contacts
8:8p8c

— Connector Type
S:Socket

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB Jack 8 Positions 1*2 Port W/ Shell 3.56mm With LED Type	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1129-04 SERIES	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	2 OF 2					
DRAWING NO.	C-DS1129-04-XXXXX-XX-B							